

Patent Office

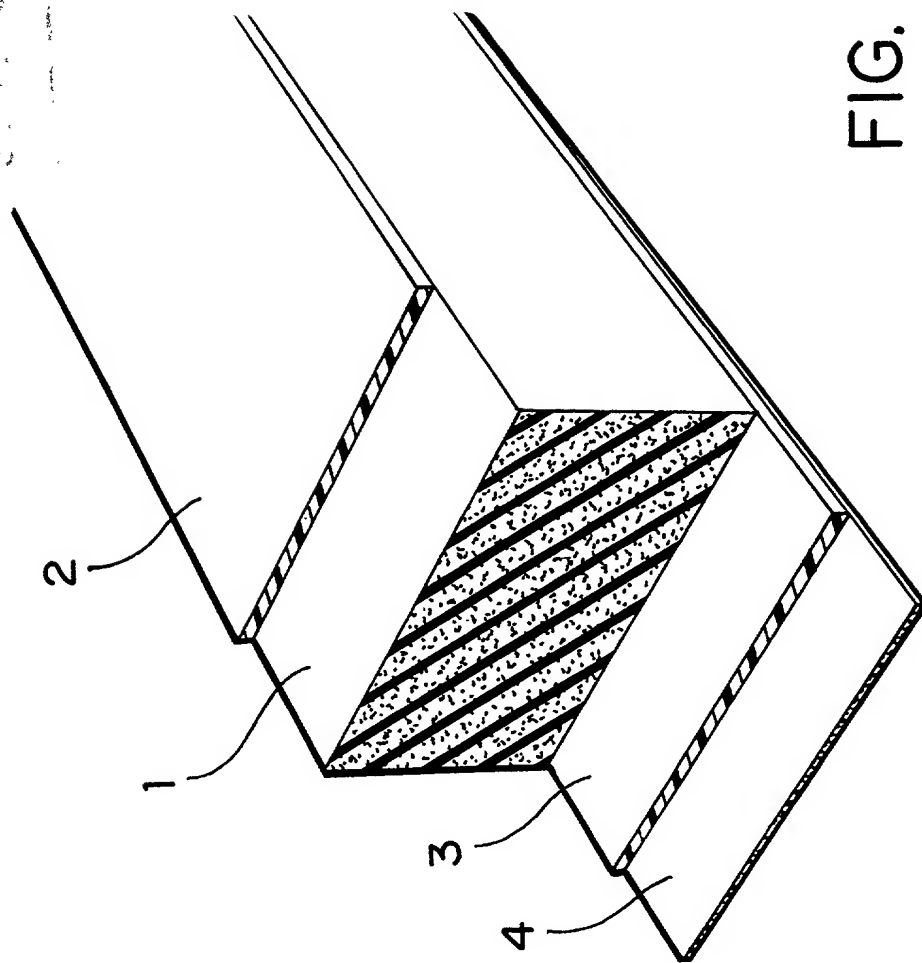


FIG. 1

2025 RELEASE UNDER E.O. 14176

A & D: 1/16" NEOPRENE/NYLON STRETCH LAYER WITH
FOUR-WAY MOBILITY; SEALS CONFOR

B: 1/8" NEOPRENE/RUBBER
NON-STRETCH LAYER;
REDUCES TRAUMA BY
DAMPENING

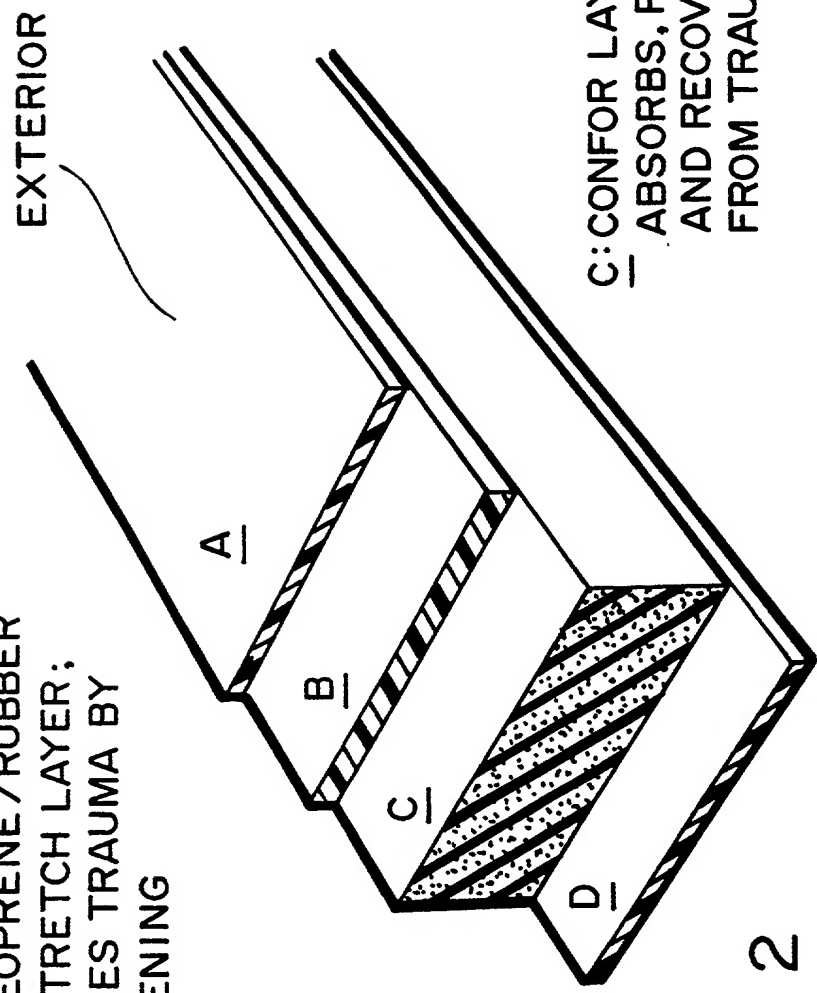


FIG. 2

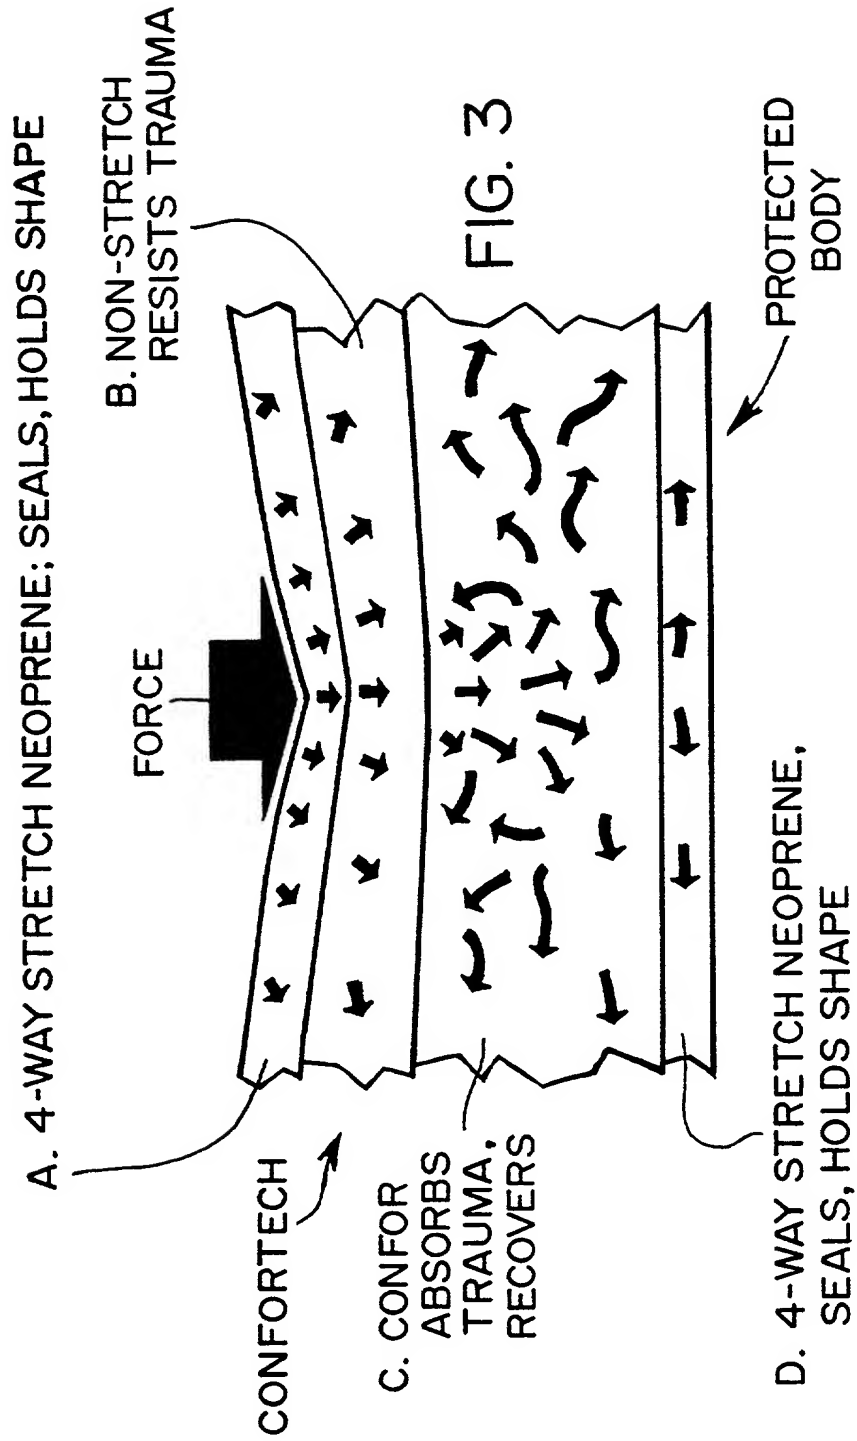




FIG. 4a

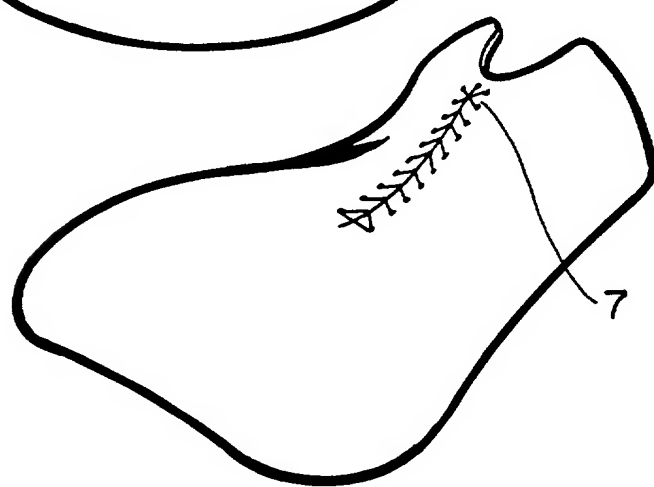
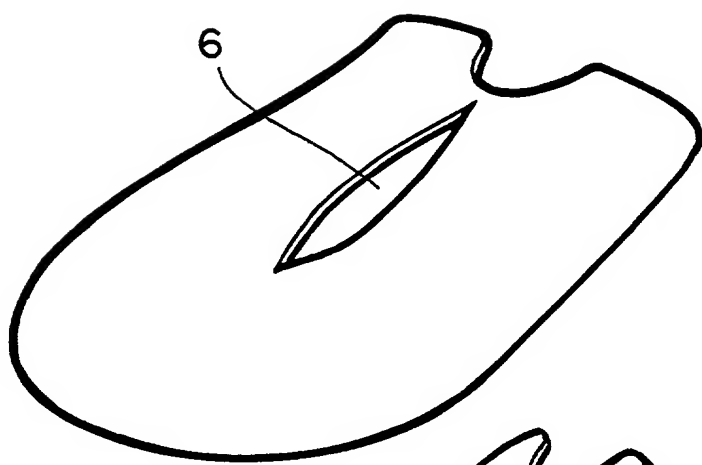
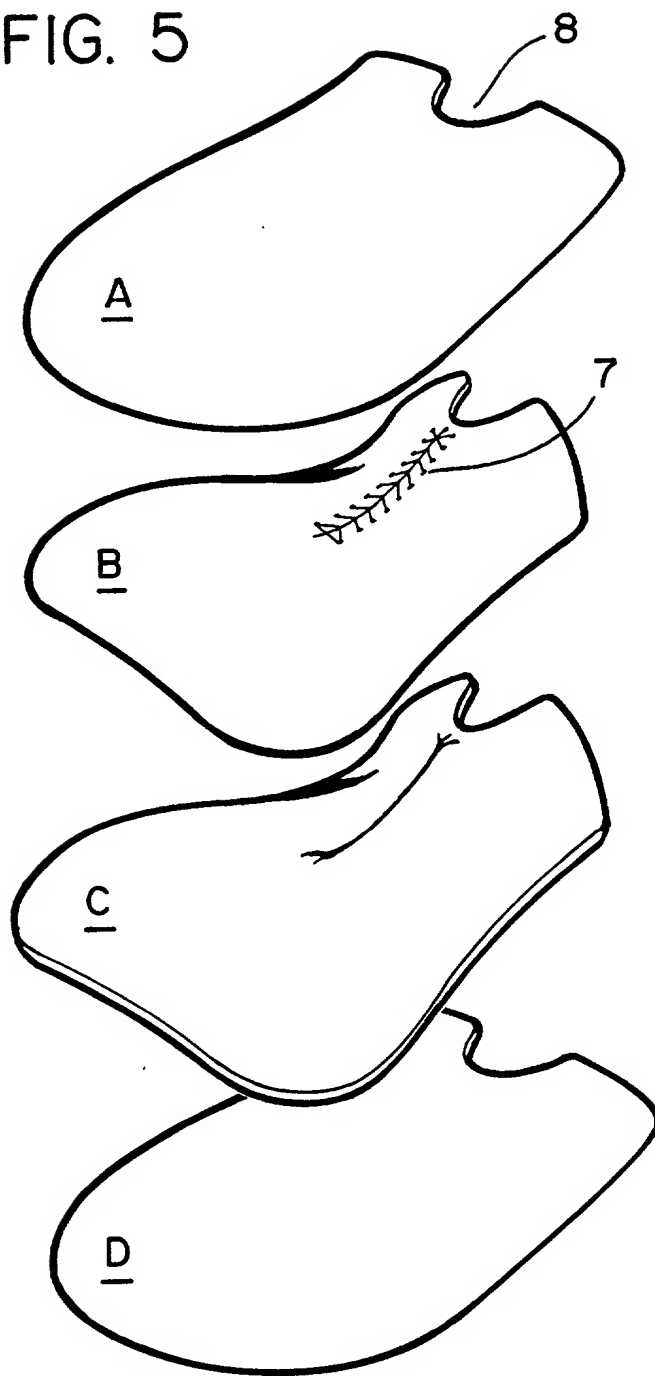


FIG. 4b

U.S. PAT. 2,845,456

FIG. 5



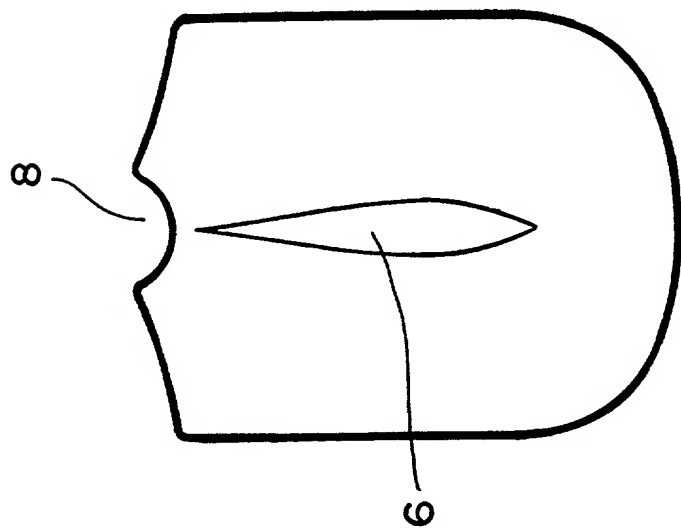


FIG. 6a

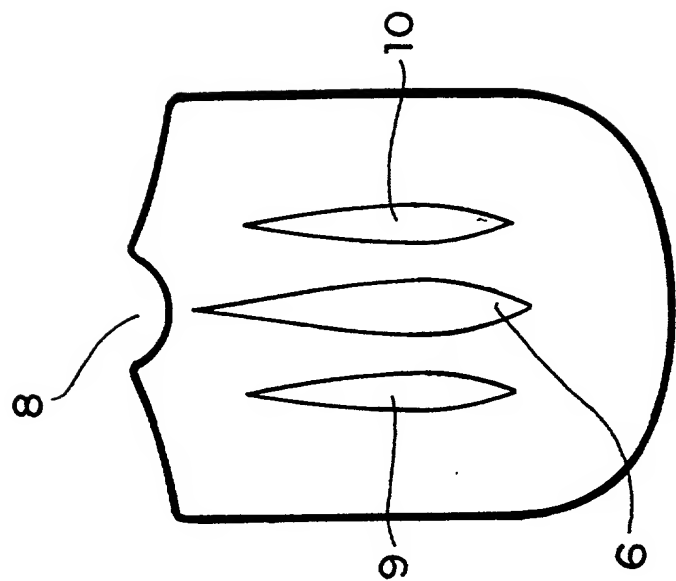


FIG. 6b

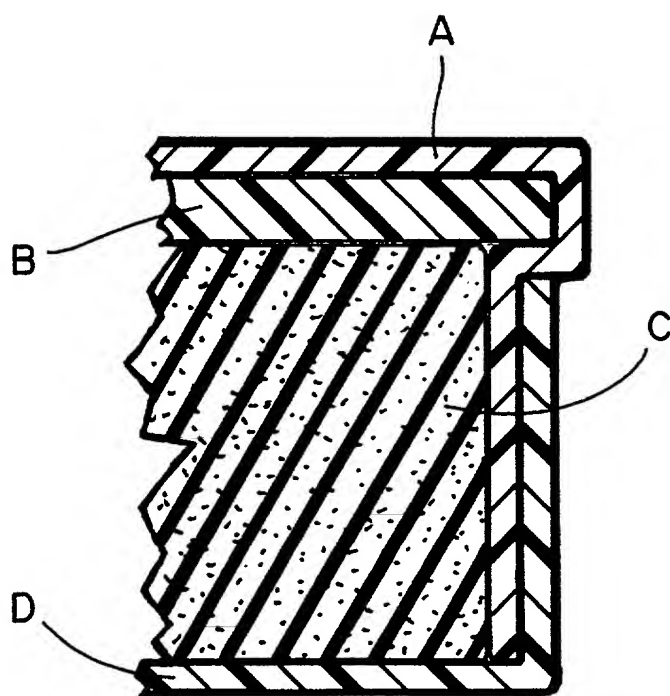


FIG. 7

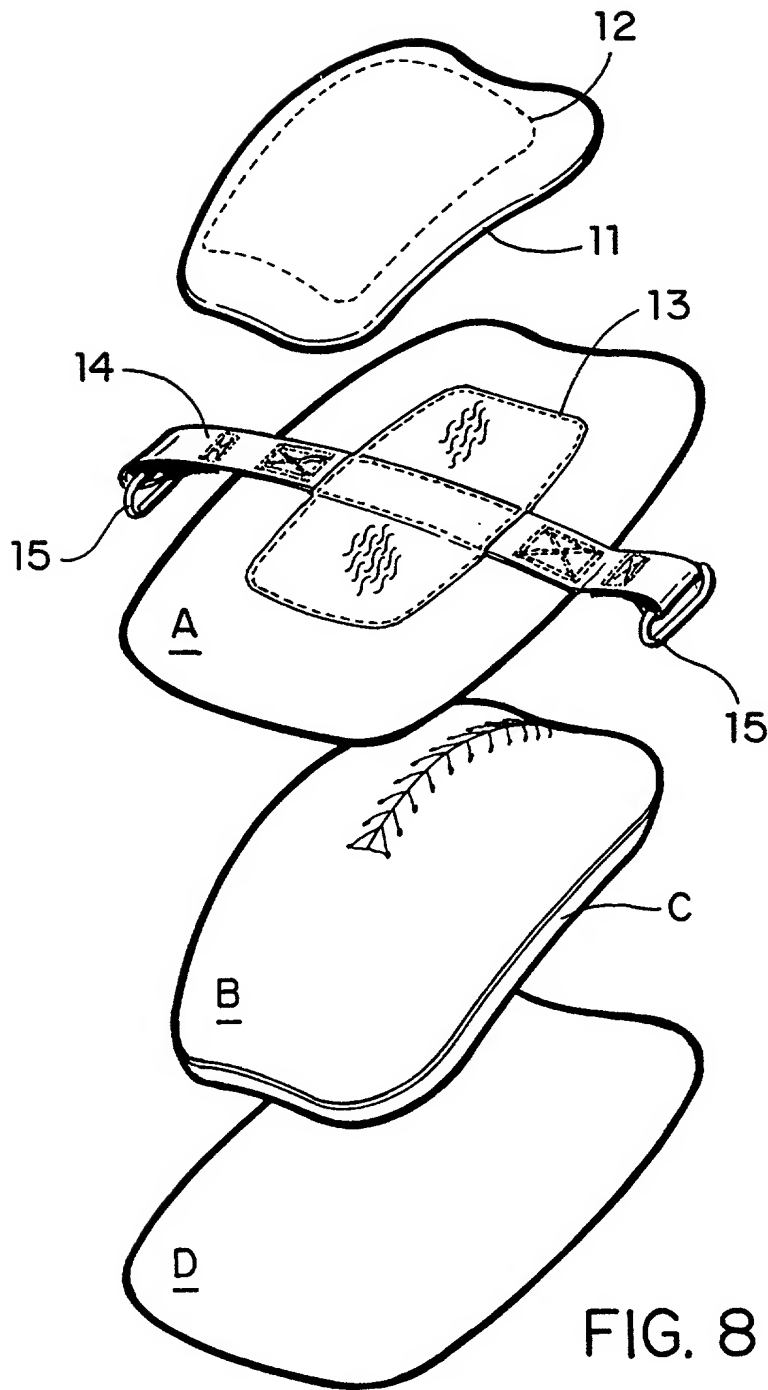


FIG. 8